



NCS01W8 SERIES 3.3-16.8 WATT NON ISOLATED DC-DC CONVERTER

Features

- Efficiency Up to 95%
- Regulated Outputs
- Fully Protected (OCP/OTP/UVLO)
- Operating Ambient Temperature -40 to +105°C
- 0.48"x0.34"x0.69" Size Pin Compatible with LMxx Linear Regulators (SIP-3)
- EN 55032 Compliant with External Circuits
- Safety Meets IEC/EN/UL 62368-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	24V VIN	48V VIN	
NCS01W8-48S033	6-72 VDC	3.3 VDC	0 mA	1000 mA	0.5 mA	56 mA	84	82	3300uF
NCS01W8-48S050	8-72 VDC	5 VDC	0 mA	1000 mA	0.5 mA	121 mA	88	86	3300uF
NCS01W8-48S090	12-72 VDC	9 VDC	0 mA	1000 mA	0.5 mA	208 mA	92	90	1500uF
NCS01W8-48S120	15-72 VDC	12 VDC	0 mA	1000 mA	0.5 mA	275 mA	93	91	1000uF
NCS01W8-48S150	18-72 VDC	15 VDC	0 mA	1000 mA	0.5 mA	340 mA	94	92	680uF
NCS01W8-48S240	28-72 VDC	24 VDC	0 mA	700 mA	0.5 mA	369 mA	--	95	330uF

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage
NCS01W8	II	O	XXX
NCS01W8	48 : 48 VDC	S : Single	033 : 24VDC

Part Number Example:

NCS01W8-48S05: 5W, 9:1 8-72Vdc Input, Single 5Vdc Output



NCS01W8 Series

TECHNICAL SPECIFICATIONS

			Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3	72	V _{dc}
Input Surge Voltage	100ms max.	All		100	V _{dc}
Operating Ambient Temperature	With de-rating		-40	85	°C
Operating Case Temperature	At the center part of case plate	All		105	°C
Storage Temperature		All	-55	125	°C
Thermal Impedance	*Thermal test condition with vertical direction mounted on a PCB with 2oz copper and 1.6mm thickness	All	26		°C/W

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	See Model Number Table			V _{dc}
Input Under Voltage Lockout						
Turn-On Voltage Threshold	100% Load	3.3V	4.8	5.2	5.8	V _{dc}
		5V	6.5	6.9	7.5	
		9V	10.2	10.9	11.7	
		12V	12.4	13.2	14.3	
		15V	15.5	16.4	17.7	
		24V	23.8	25.6	27.6	
Turn-Off Voltage Threshold	100% Load	3.3V	4.4	4.8	5.2	V _{dc}
		5V	5.8	6.4	6.9	
		9V	9.2	10.0	10.8	
		12V	11.1	12.1	13.1	
		15V	13.8	15.1	16.3	
		24V	21.3	23.2	25.1	
Maximum Input Current	V _{in} = V _{in min.} , full load	All		0.9		A
No-Load Input Current	I _o =0A, V _{in} =Nominal	All		0.5		mA
Input Filter	Capacitive	All				
Inrush Current (I ² t)	As per ETS300 132-2	All			0.1	A ² s
Input Reflected Ripple Current	V _{in} =Nominal, L=12uH, C=47uF, Load=full load	All		30		mA

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	Full load, T _c =25°C	All	-2		+2	%
Load Regulation	Full load to no load	All			±0.6	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.5	%
Temperature Coefficient	T _c =-40°C to 85°C	All			±0.02	%/°C
	Full load, 1uF ceramic capacitors	All			75	mV
Output Current Range	V _{in} = 6V to 72V	See Model Number Table				A
Over Current Protection	% of I _{out} rated, hiccup mode. Auto recovery	Others 24V	165 230			%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (resistive)	See Model Number Table				uF



NCS01W8 Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	Full load, $T_c=25^\circ\text{C}$	See Model Number Table				%

	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Error Band	50% to 100% of I_{o_max} step load change $dI/dt=0.1\text{A/us}$ (within 1% V_{out} nominal)	All			± 3	%
Recovery Time		All			250	us
	$V_{in\ min.}$ to 10% V_{o_set} , Power up	All		25		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	All		8		ms

	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse wide modulation	3.3V	125	185	245	KHZ
		5V	140	200	260	
		9V	168	250	333	
		12V	200	275	350	
		15V	224	320	416	
		24V	280	405	530	
Over Temperature Shutdown	Internal IC temperature, automatic recovery	All		150		$^\circ\text{C}$
Over Temperature Recovery		All		135		$^\circ\text{C}$


PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of $I_{o_max.}$; MIL-HDBK - 217F_Notice 1, GB, 25°C	3.3V		10447		K hours
		5V		8217		
		9V		9226		
		12V		9946		
		15V		9326		
		24V		9853		
Weight		All		6.8		grams
Case Material	Metal					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Matte Tin					
Shock/Vibration	MIL-STD-810F Compliant					
Humidity	95% RH max. Non condensing					
Altitude	4000m Operating altitude					
Thermal Shock	MIL-STD-810F					

EMI	Meets EN 55032 Compliant (with external filter)	Class A&B
Application Note Link	NCS01W8 Series App Notes	
Packaging Information Link	Packaging Information	







CHARACTERISTIC CURVE

Power Derating Curve

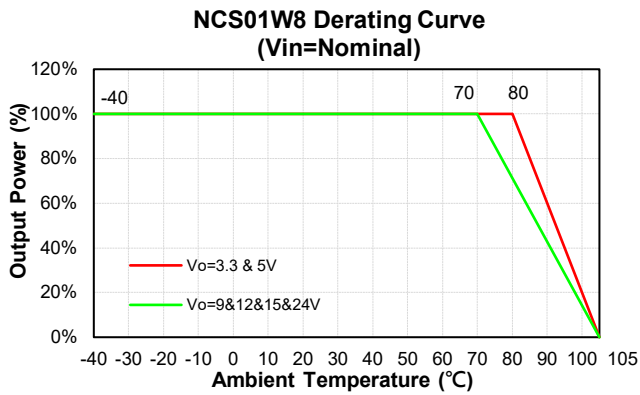


Performance Data

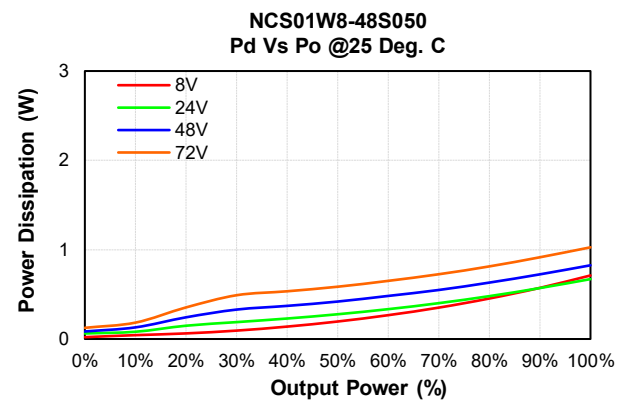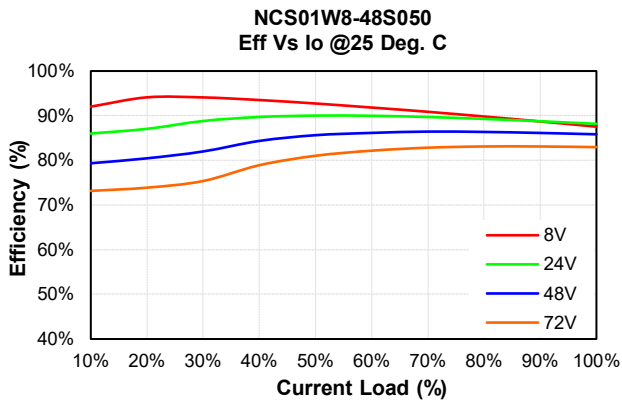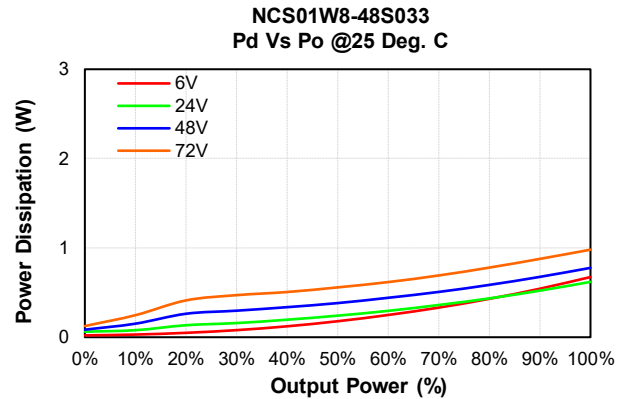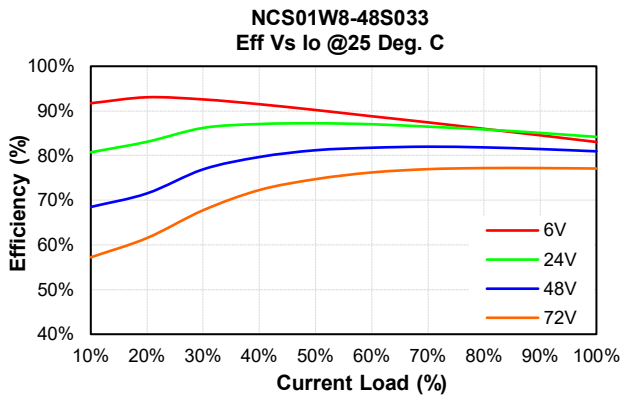




NCS01W8 Series


NCS01W8-48S090
Eff Vs Io @25 Deg. C

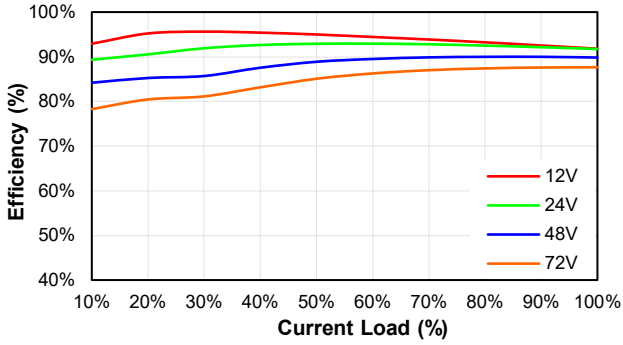


NCS01W8-48S090
Pd Vs Po @25 Deg. C

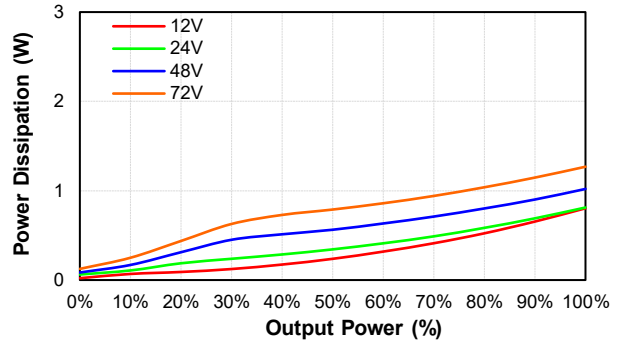


NCS01W8-48S120
Eff Vs Io @25 Deg. C

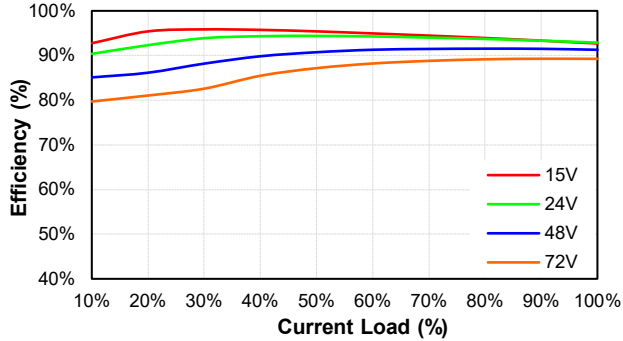


NCS01W8-48S120
Pd Vs Po @25 Deg. C

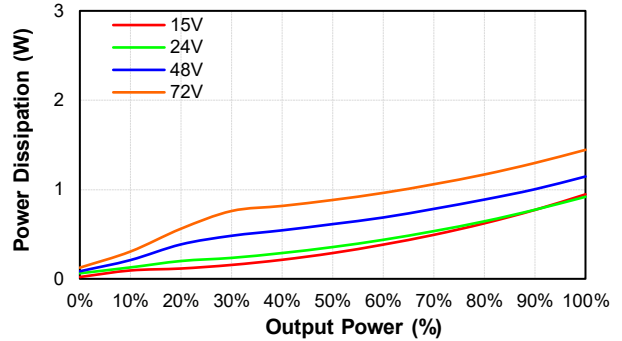


NCS01W8-48S150
Eff Vs Io @25 Deg. C

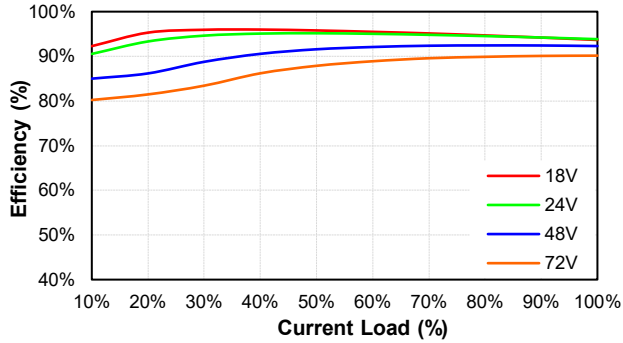


NCS01W8-48S150
Pd Vs Po @25 Deg. C

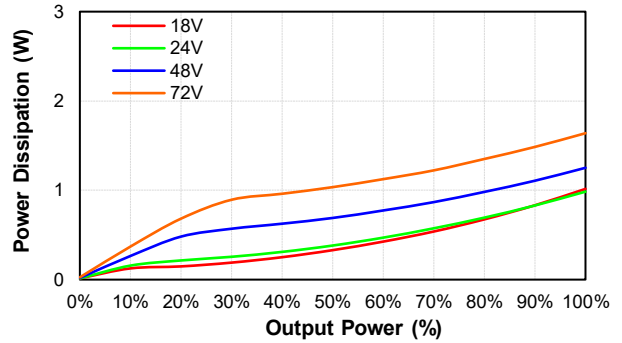

NCS01W8-48S240
Eff Vs Io @25 Deg. C

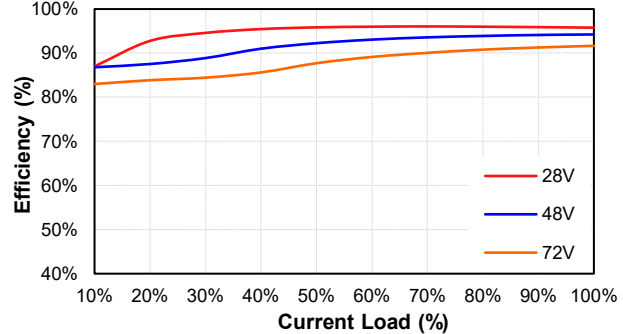


NCS01W8-48S240
Pd Vs Po @25 Deg. C

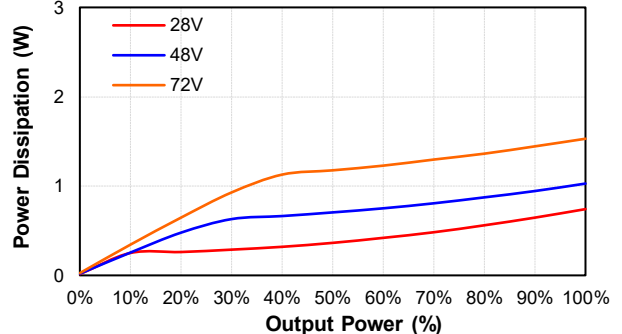



NCS01W8 Series

MECHANICAL SPECIFICATION

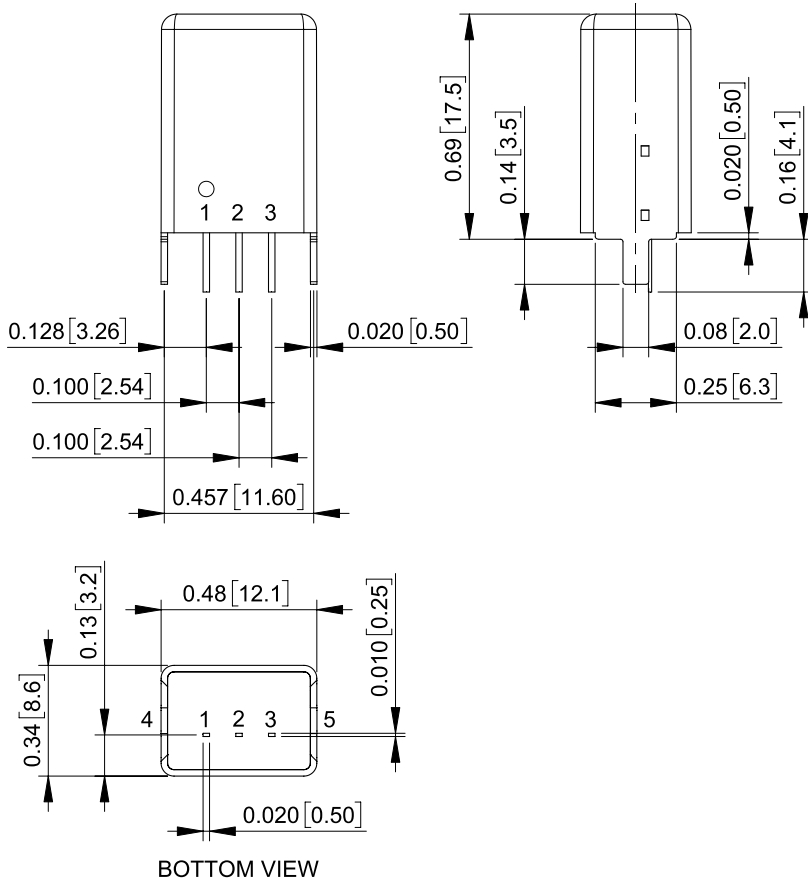

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
 Millimeters: x.x=±0.5, x.xx=±0.25

Pin Connection

Pin	Function
1	+Vin
2	GND
3	+Vout
4	Case Pin
5	Case Pin

Note: Pin Size is x.xxx±0.004 Inch [x.xx±0.10 mm]